
COMROD AC21BI

Multi Band Cellular and WLAN Antenna



AV-C adapter: To be able to make all BI version antennas to a side feed cable version an AV-C adapter is required.

4-way bracket and coaxial cable not included **UNS: Unifield Special**

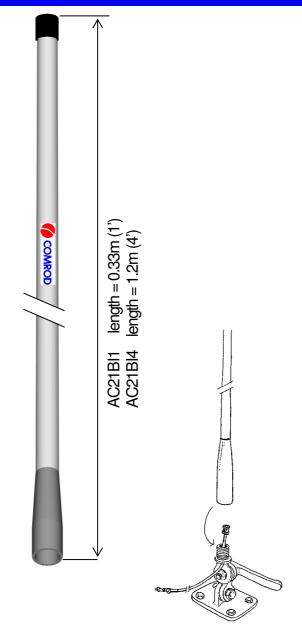





Application:

AC21BI is a broad band antenna for cellular phones, and it covers systems such as 3G, 4G and wireless LAN. Available in two lengths, 0.3m and 1.25m. The antenna is omnidirectional. It is a high quality antenna with a durable construction and a

Electrical specifications:

Frequency range	806-960MHz 1710-2690MHz
VSWR	See diagram, overleaf
Nominal impedance	50 ohm
Power rating	20 W
Gain	See diagram, overleaf
Polarization	Vertical
Connector	BNC female

Mechanical specifications:

Design	Dipole with a coaxial choking sleeve to suppress cable radiation. Radiating elements completely enclosed in polyurethane foam within a fiberglass tube.
Height	AC21BI: 0.33m AC21BI4: 1.2m
Weight	AC21BI: 0.5 kg
Wind rating	55 m/s = 125 mph
Finish	Polyurethane lacquer, white
Temperature range	-40°C, +50°C;+ -28°F,+122°F

Mounting:


The AC21BI is fitted with UNS1"x14 female ferrules. Can be used with all standard mounting accessories. Integrated BNC female coaxial connector. All BI versions come with a tool to mount the BNC male coaxial connector inside the stainless steel ferrule.


Communication systems covered:

3G	824-960 / 1710-2170MHz
4G	824-960 / 1710-2690MHz
TDMA, CDMA	824-897 / 1850-1990MHz
GSM 900 / 1800	860-960 / 1710-1990MHz
UMTS ,WCDMA, PCS-1900	1850-2170MHz
EDGE	860-960 / 1710-1990MHz
DECT	1880-1900MHz
WLAN 802.11b-h	2.4-2.5GHz
ZigBee	868-928MHz/2.4-2.48Gz
SMR iDEN	806-869MHz
Bluetooth	2.4-2.48GHz




Typical radiation diagram, Elevation:

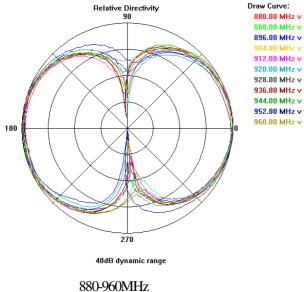


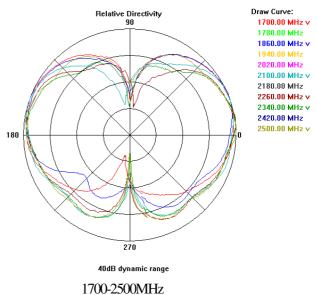

Typical VSWR curve

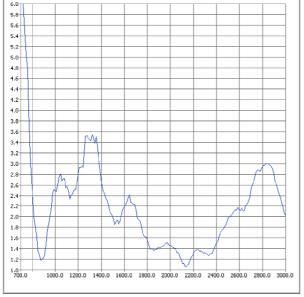

Gain curve versus frequency

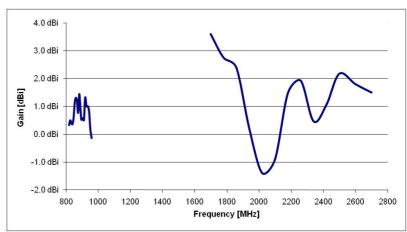

VSWR < 2 for: 820-940 and 1790-2500MHz VSWR < 2.5 for: 800-1010 and 1420-2700MHz