

COMROD AV7M


Marine VHF Antenna

Application:

AV7 is a high quality dipole antenna designed for the marine VHF radio telephone service. It is a high quality antenna with a durable construction and a beautiful finish for installation on all kinds of vessels.

Electrical specifications:

Frequency range	156-162 MHz, VSWR < 1.5:1 145-165 MHz, VSWR < 2:1
Nominal impedance	50 ohm
Power rating	100 W
Gain	2 dbi
Pattern	Horizontal plane: Omnidirectional Vertical plane: See reverse page
Polarization	Vertical
Connector	UHF female is standard
DC-grounded	Yes

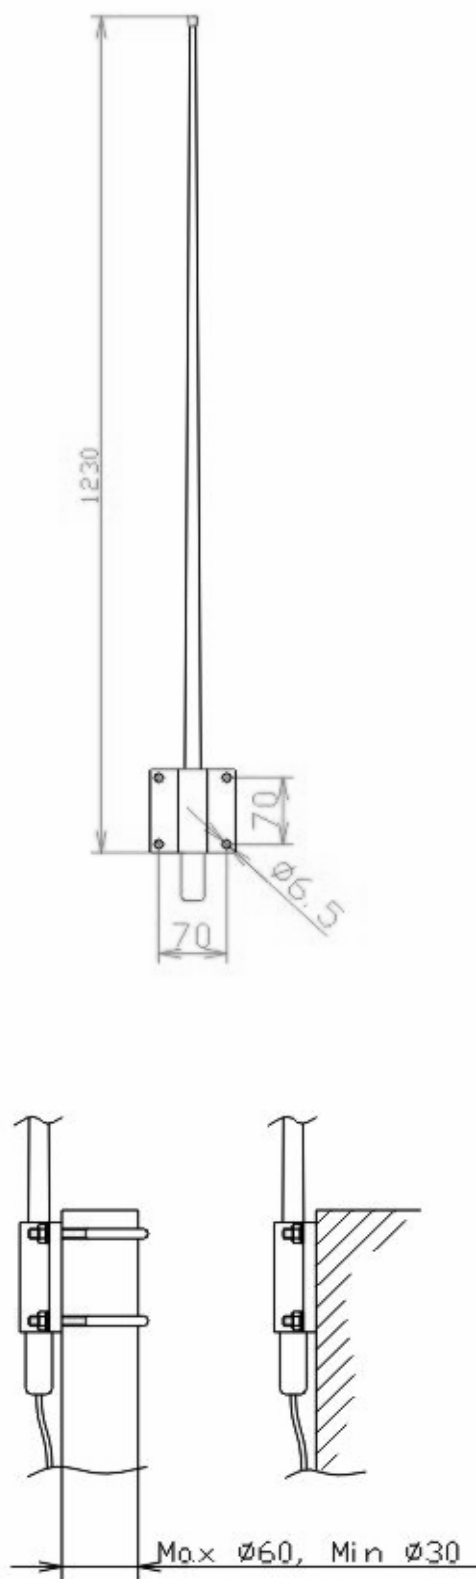


Mechanical specifications:


Design	Centered coaxial dipole. Radiating elements completely enclosed in polyurethane foam within a fiberglass tube. Mounting bracket in aluminium.
Height	1.25 m (4 ft)
Weight	1 kg, including U-bolts
Wind rating	55 m/s = 125 mph
Finish	Polyurethane lacquer, white
Temperature range	-55 °C, +71 °C; -67 °F, +160 °F

Mounting:

AV7 is easily mounted to the bulkhead by means of 4 holes in the aluminium bracket, or to a mast or tube with U-bolts. The tube may be horizontal or vertical. The U-bolts in stainless steel, are included. Suitable cable: RG8, RG213 or similar.

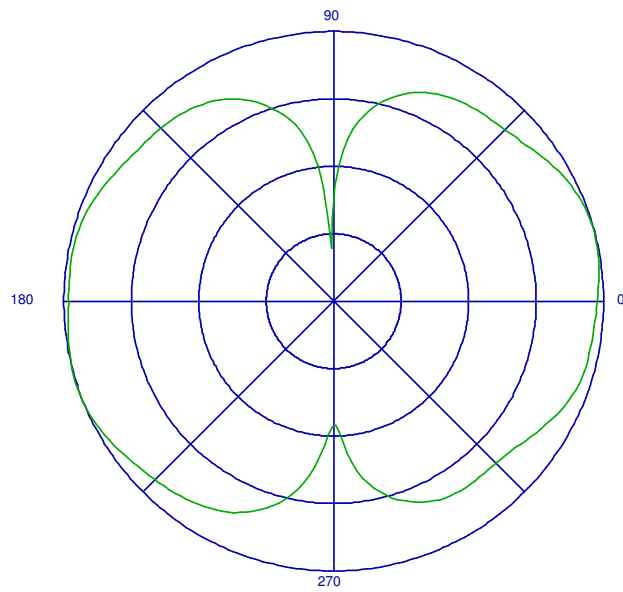

Vertical radiation diagram
 $f=160\text{MHz}$
 40 dB dynamic range, 10dB/div

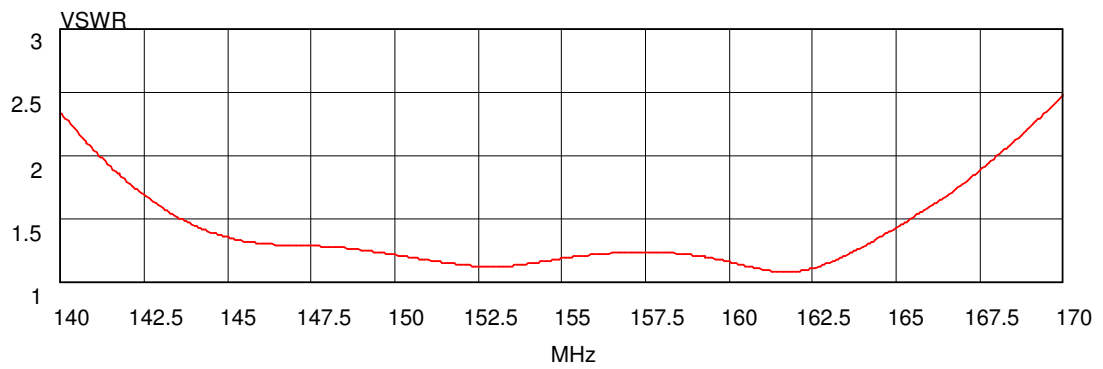

Standing wave ratio